



TECHNICAL  
SPECIFICATIONS

Product Code	PM060-MI44-SCH
Dimension (mm) W x L x H	50x50x5,7
Material	PMMA
Fastening	Screw
Beam Angle	60°
Type	16 in 1
Optical Efficiency	%93
Rohs Complaint	Yes


MATERIALS

PMMA clear, Non-yellowing for 10 years.  
Yellowness Index (YI) according to the test standarts for Arizona/Florida outdoor exposure testing:  
-YI 6 under hot/dry conditions  
-YI 8 under hot/wet conditions


INSTRUCTIONS FOR USE &  
MAINTENANCE

Working Temperature : -40° C ~ +100° C  
Storage Temperature : -40° C ~ +100° C  
Please handle or install lenses with wearing gloves.  
Skin oils may damage lens or its optical characteristic.  
Never use any commercial cleaning solvents on lenses , like alcohol.  
If necessary, clean lenses wiht mild soap, water and soft cloth.


**OSRAM DURIS S5**

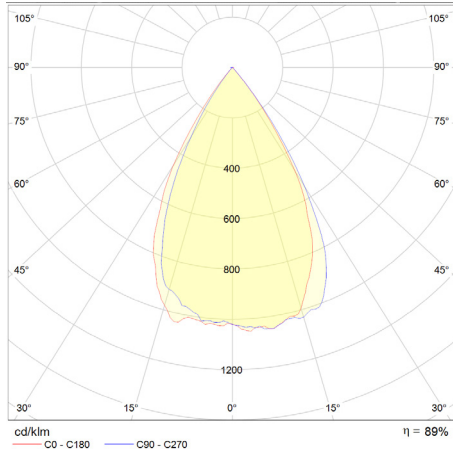


**LUXEON 3030 2D**

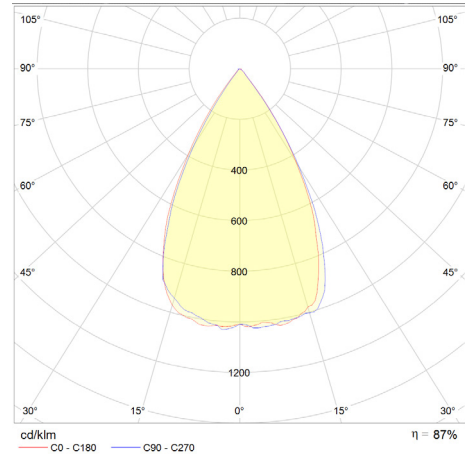


**SEOUL MJT 3030**

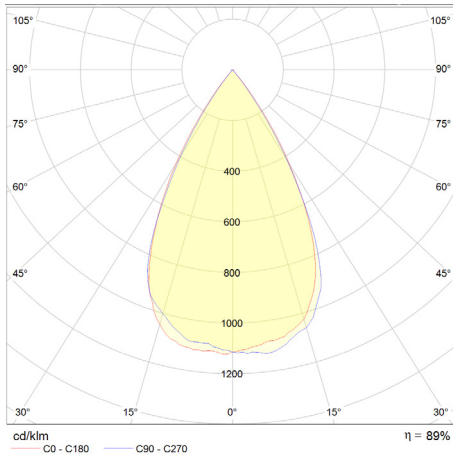


**NICHIA NF2W 757 GR**

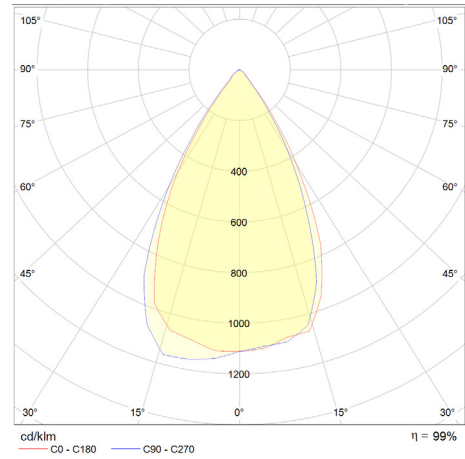




**CREE J SERIES**

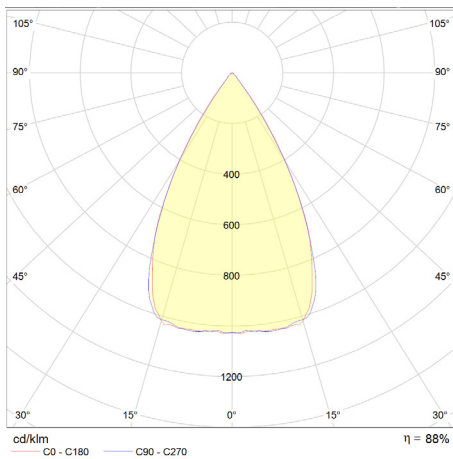

**SAMSUNG LM302Z+**

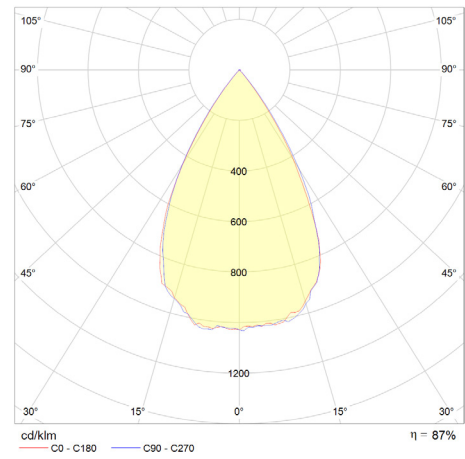

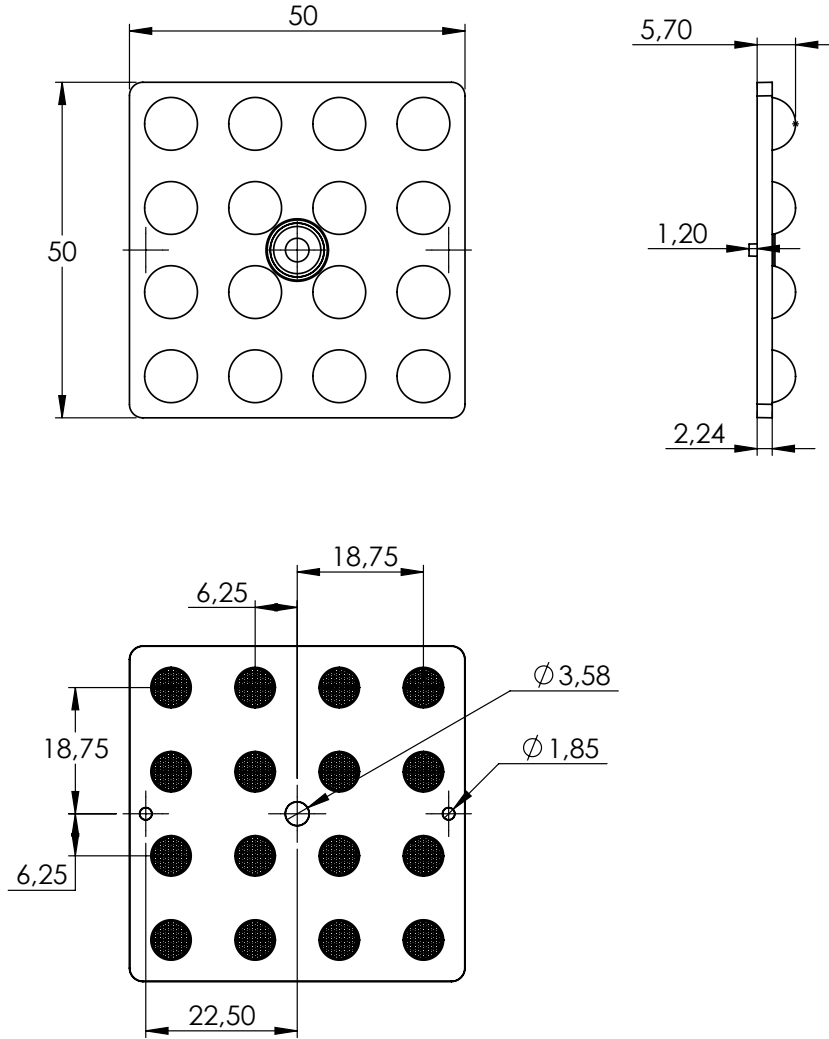

	UNIT mm	PART NO: PM060-MI44-SCH	 GENERAL TOLERANCES $\pm 0,2$ MM	
	MATERIAL	PMMA	REV.	REVISION
	WEIGHT	8,2 g	1	
	DATE	20.10.2020	2	
			3	
		PAGE 1 / 1	FORM A4	SCALE 1:1

Box Size (mm) W x L x H	370x300x225
Box Weight	8 Kg
Box Quantity	810 pcs

